


# 1 colson<sup>®</sup> SERIES

Capacity up to 75 lbs each

www.colsoncaster.com

## Grip Ring Stem

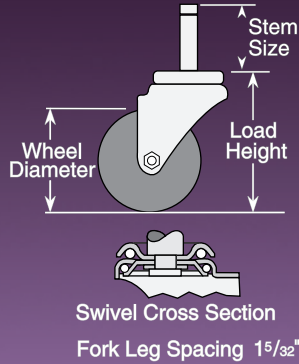

### Standard Features

- Zinc plated finish is attractive and durable
- Full double ball hardened raceways for better performance and greater durability
- 5/16" shouldered axle with 1/4" nut
- "Colson 45" multi-temp grease lubricates in extreme hot and cold temperatures

## Performance Options

### Mounting Options

- MTG1:** 3/8" x 19/16" long
- MTG2:** 7/16" x 19/16" long
- MTG50:** 7/16" x 1" long
- MTG51:** 7/16" x 1 29/32" long (less grip ring)

### Caster Brake

**Side Lock** (See page 12)  
Available on all 3" models. Field installable (Specify **BRK3**).

### Fork Option

**NSF Listed** (See page 3)  
All models except thread guards (Specify **FSI**).



### Wheel Option

**Thread Guards** – Available on many models. Brake & NSF options cannot be used with thread guards (Specify **TG1** for metal **TG2** for plastic).

Spring grip on top of stem holds caster firmly in place.

**Standard Mounting (MTG52):**  
7/16" x 1 29/32" long  
(with grip ring)

## Wheel Selection



PERFORMA  
FLAT TREAD



POLYOLEFIN



POLYURETHANE  
HI-TECH



CUSHION  
RUBBER



HARD  
RUBBER

## 1 SERIES • Grip Ring Stem • Capacity up to 75 lbs

Wheel Dia.	Tread Width	Capacity Each (Pounds)	Wheel Descriptions	Wheel Bearing	Stem Caster Models	Load Height	Swivel Radius	Weight (Pounds)
1 5/8"	7/8"	60	Performa Rubber	Delrin	1.01651.441	2 1/2	1 3/4	1/2
		75	Polyolefin	Delrin	1.01651.52	2 1/2	1 3/4	1/2
2"	7/8"	75	Performa Rubber	Delrin	1.02251.441	2 11/16	1 15/16	1/2
			Polyolefin	Delrin	1.02251.52	2 11/16	1 15/16	1/2
			Cushion Rubber	Ball	1.02251.45	2 11/16	1 15/16	5/8
			Hard Rubber	Ball	1.02251.55	2 11/16	1 15/16	5/8
3"	7/8"	75	Performa Rubber	Delrin	1.03051.441	3 13/16	2 9/16	3/4
			Polyurethane HI-TECH	Delrin	1.03051.91	3 13/16	2 9/16	3/4
			Polyolefin	Delrin	1.03051.53	3 13/16	2 9/16	3/4